



PANTES

HOME DECORATION GALLERY

FUMIRA
Premium Galvanized Steel Roofing

Coating Materials

PANTES
HOME DECORATION GALLERY

ZINC COATED

Diproduksi menggunakan Continuous Galvanizing Line (CGL) dengan sistem Non-Oxidizing Furnace (NOF), sehingga menghasilkan produk baja lapis seng (BjLS) terbaik dengan kemampuan 0 (zero) T bend.

**GARANSI
KOROSI
8-15 TAHUN**

COLORCOAT®

Produk warna Fumira dengan bahan dasar polyester yang tahan terhadap abrasi air hujan, angin, dan debu. Pilihan tepat untuk iklim tropis. Tersedia dalam berbagai pilihan warna.



COLORFRESH®

Produk warna Fumira dengan bahan dasar polyurethane yang tahan terhadap cuaca ekstrim. Memiliki daya bersih sendiri. Tersedia dalam berbagai macam variasi warna.



COLORGRIP®



Produk warna Fumira dengan bahan dasar polyvinylidene difluoride (PVDF) yang memiliki ketahanan sempurna dari kepudaran dan pengapuran dengan tampilan berkilau yang tetap terjaga dalam waktu lama. Tersedia dalam berbagai macam variasi warna.



Color Group



Colorcoat

		 Ready Stock (BMT 0.45 mm)
G 104 Mawar Red	F 101 Coke Red	G 101 Tahiti Red*)
		
G 203 Bromo Blue	F 205 Regata Blue	F 302 Old Green
		
G 304 Fuji Green	F 301 Light Green	F 303 Olive Green
		
F 401 Fumira Brown	F 402 Brown	F 501 Cream
		
G 502 Silver	F 505 Rogapol Be Grey	F 604 Whisper White

Colorfresh



	 Ready Stock (BMT 0.45 mm)	 Ready Stock (BMT 0.45 mm)	 Ready Stock (BMT 0.45 mm)
F 601 White F. Matt	F 605 Traffic White	F 516 Fumira Black	F 518 Quartz Grey
			
F 214 Irman Blue*)	F 544 Mint Turquoise*)	F 502 FM Grey*)	F 503 Calm Grey*)
			
F 514 Rogaster Be ADM Grey*)	F 525 Alu Grey*)	F 212 Navy Blue*)	

Table of Content

PANTES
HOME DECORATION GALLERY





























 Click-330	 330 23 Click-330 Thickness: 40-50 Bj.L.S Minimum Length: 1,50 m Maximum Length: Upon Request	 K-165	 165 13 K-165 Thickness: 35-50 Bj.L.S Minimum Length: 1,50 m Maximum Length: Upon Request
 BL-600	 600 300 90 BL-600 Thickness: 45-80 Bj.L.S Minimum Length: 1,50 m Maximum Length: 12 m	 BL-710	 710 355 40 BL-710 Thickness: 35-75 Bj.L.S Minimum Length: 0,65 m Maximum Length: 12 m
 SF-650	 650 166 SF-650 Thickness: 45-100 Bj.L.S Minimum Length: 1,50 m Maximum Length: 12 m	 SF-750	 750 375 20 35 55 SF-750 Thickness: 40-60 Bj.L.S Minimum Length: 1,50 m Maximum Length: 12 m
 COMPODECK 680	 680 50 COMPODECK-680 Thickness: 70-100 Bj.L.S Minimum Length: 1,00 m Maximum Length: 12 m	 COMPODECK 1000	 1000 50 COMPODECK-1000 Thickness: 70-100 Bj.L.S Minimum Length: 1,00 m Maximum Length: 12 m

Table of Content

PANTES
HOME DECORATION GALLERY

 A-735	 780 735 17	A-735	Thickness: 20-50 Bj.L.S	Minimum Length: 0,65 m	Maximum Length: 12 m
 A-750	 780 750 15	A-750	Thickness: 20-25 Bj.L.S	Minimum Length: 1,00 m	Maximum Length: 12 m
 GP-550	 275 550 130 37 40 50	GP-550	Thickness: 45-80 Bj.L.S	Minimum Length: 1,50 m	Maximum Length: 12 m
 C-710	 800 710 18	C-710	Thickness: 20-80 Bj.L.S	Minimum Length: 1,50 m	Maximum Length: 3,65 m
 D-750	 800 750 9	D-750	Thickness: 20-30 Bj.L.S	Minimum Length: 1,50 m	Maximum Length: 3,65 m
 I-600	 600 88	I-600	Thickness: 45-60 Bj.L.S	Minimum Length: 1,50 m	Maximum Length: 12 m
 GG-750	 810 745 23	GG-750	Thickness: 30-60 Bj.L.S	Minimum Length: 0,65 m	Maximum Length: 12 m
 G-680	 730 680 23	G-680	Thickness: 30-60 Bj.L.S	Minimum Length: 0,65 m	Maximum Length: 12 m
 F-714	 760 714 30	F-714	Thickness: 30-60 Bj.L.S	Minimum Length: 1,00 m	Maximum Length: 12 m
 M-750	 750 15	M-750	Thickness: 35-50 Bj.L.S	Minimum Length: 1,50 m	Maximum Length: Upon Request
 N-750	 750 35 90 125 25 25 15	N-750	Thickness: 35-50 Bj.L.S	Minimum Length: 1,50 m	Maximum Length: Upon Request
 L-700	 770 700 44	L-700	Thickness: 35-80 Bj.L.S	Minimum Length: 0,80 m	Maximum Length: 12 m
 B-832	 875 832 6	B-832	Thickness: 20-40 Bj.L.S	Minimum Length: 0,75 m	Maximum Length: 12 m
 H-225	 280 225 13	H-225	Thickness: 20-40 Bj.L.S	Minimum Length: 0,65 m	Maximum Length: 5 m

Click-330

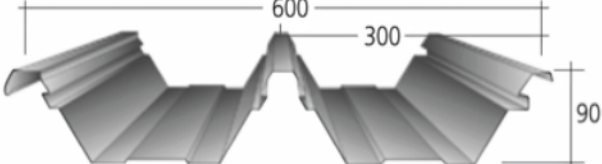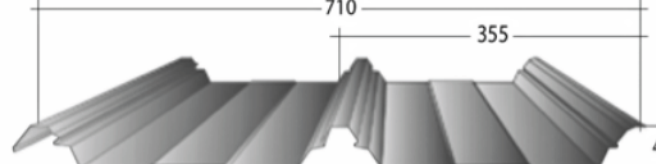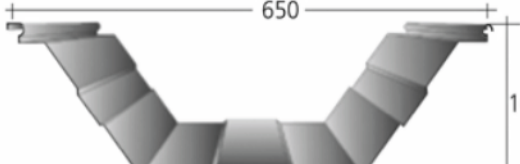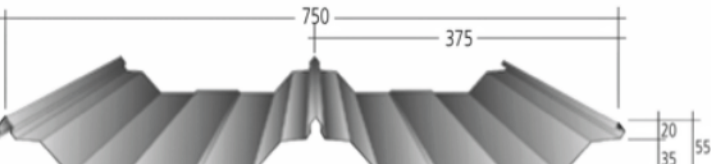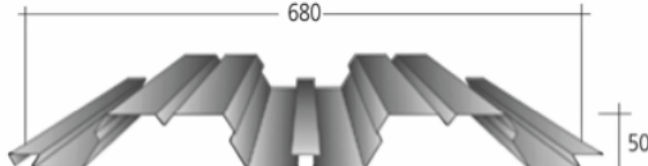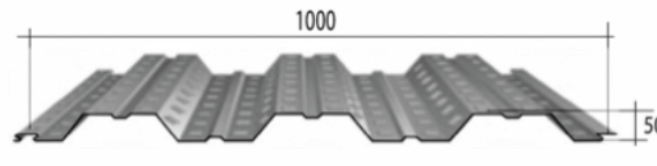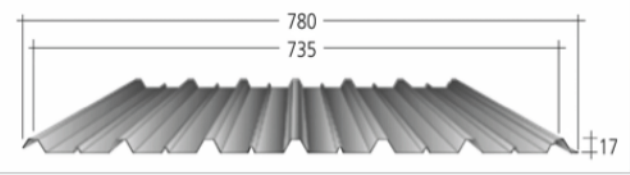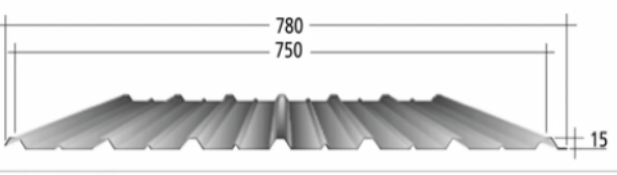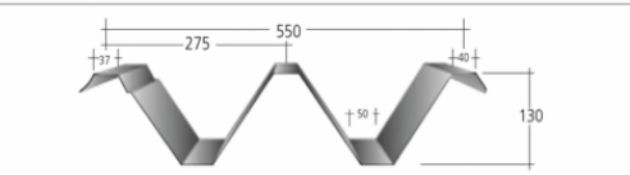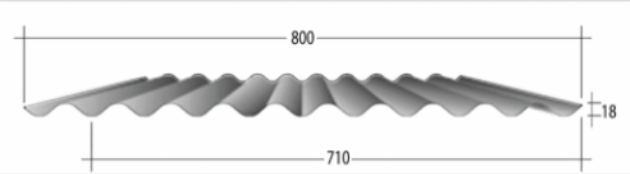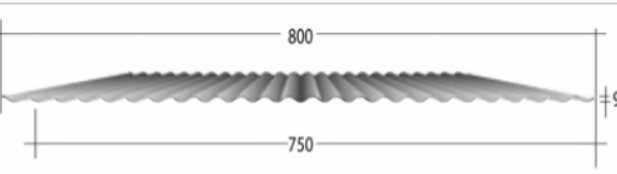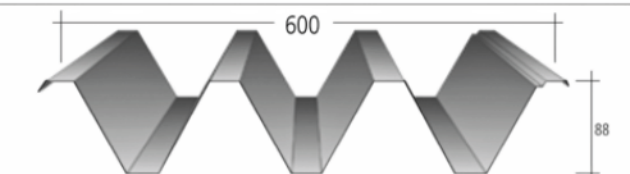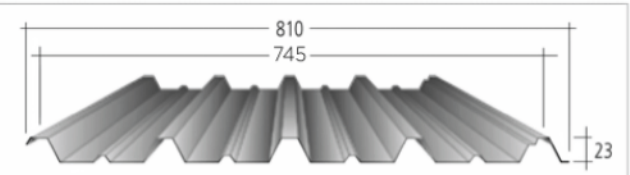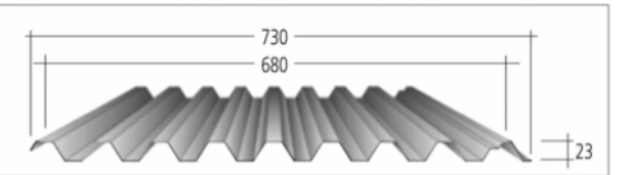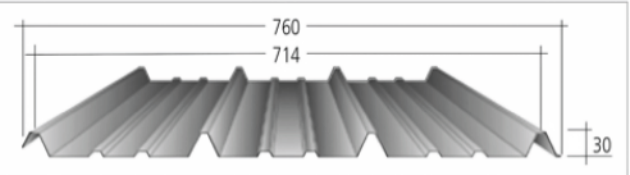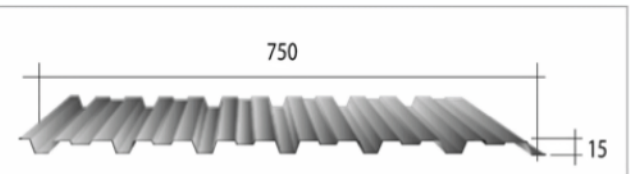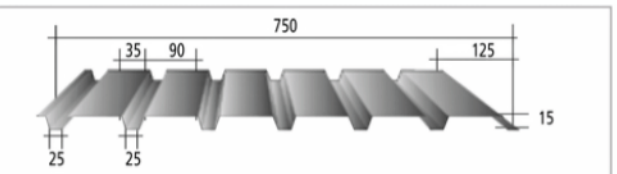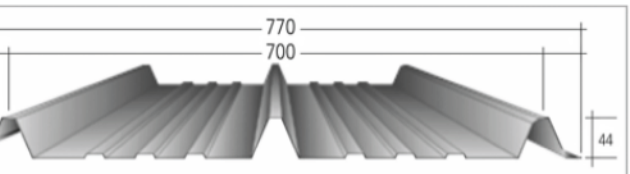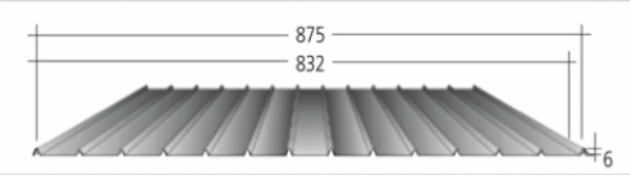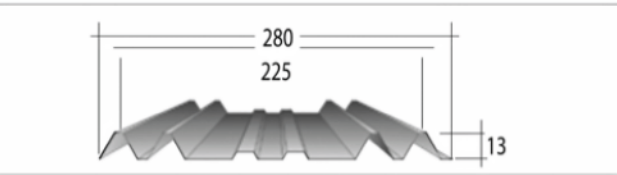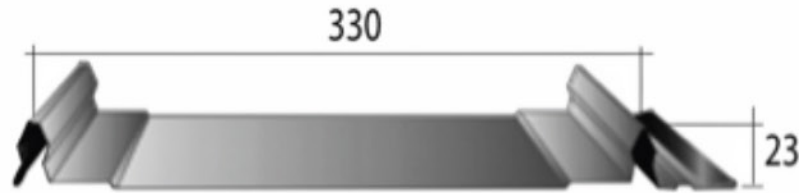

Click-330

Thickness:
45-50 Bj.L.S

Minimum Length:
1,50 m

Maximum Length:
Upon Request



Roofing





Ceiling



Siding/Walling



K-165

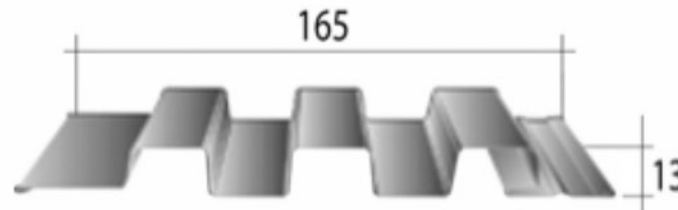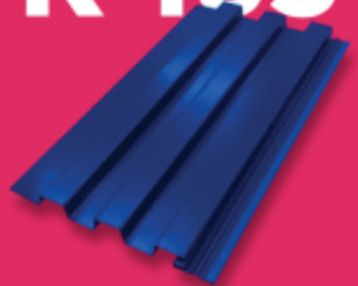

K-165

Thickness:
35-50 Bj.L.S

Minimum Length:
1,50 m

Maximum Length:
Upon Request




Ceiling



Siding/Walling



BL-600

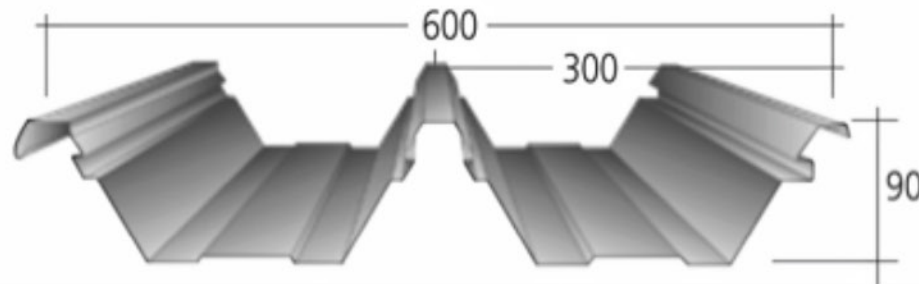

BL-600

Thickness:
45-80 Bj.L.S

Minimum Length:
1,50 m


Maximum Length:
12 m



Roofing



BL-710

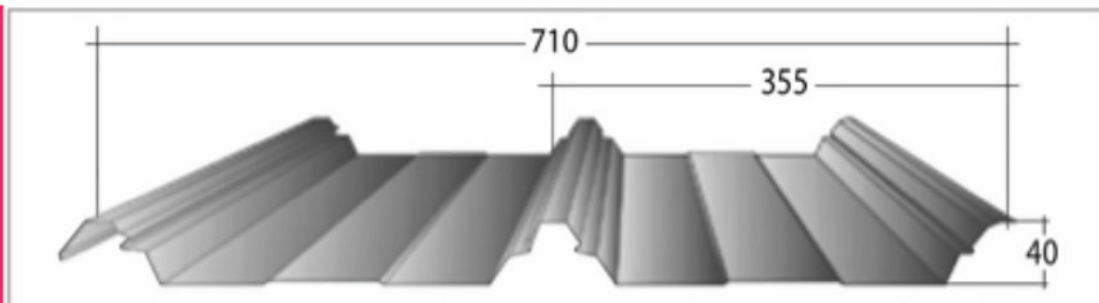

BL-710

Thickness:
45-60 Bj.L.S


Minimum Length:
1.50 m

Maximum Length:
12 m



Roofing

SF-650

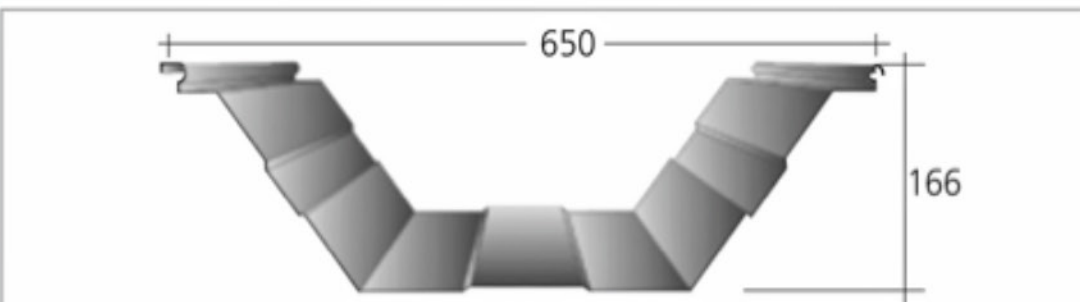

SF-650

Thickness:
45-100 Bj.L.S



Minimum Length:
1,50 m

Maximum Length:
12 m



Roofing

SF-750

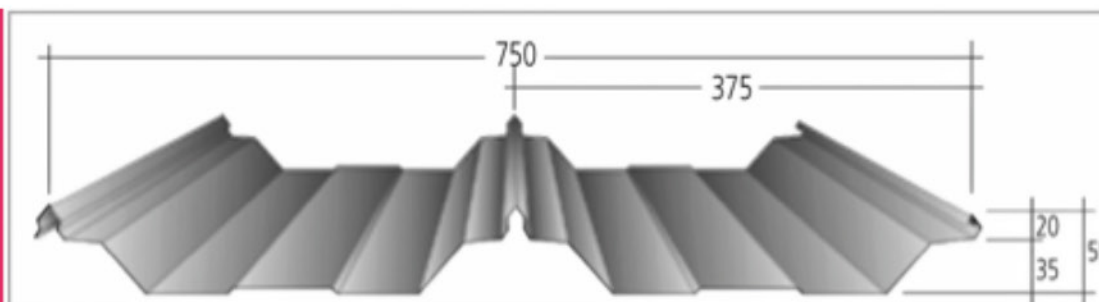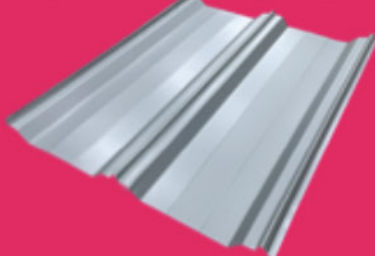

SF-750

Thickness:
40-60 Bj.L.S

Minimum Length:
1,50 m

Maximum Length:
12 m




Roofing



Floordeck

COMPODECK 680

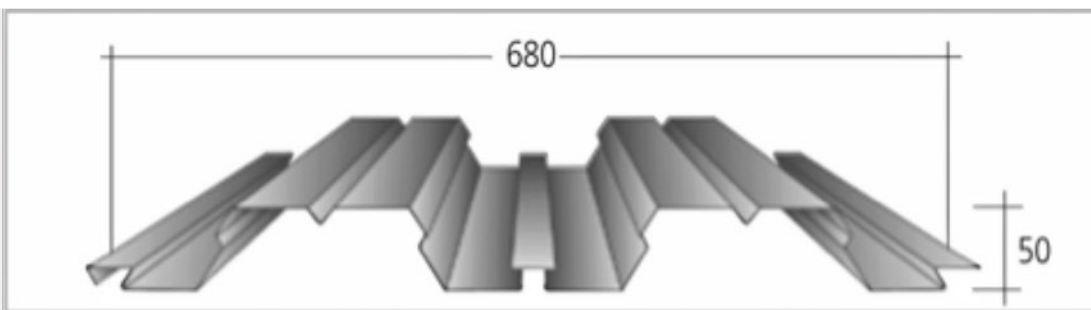


COMPODECK-680


Thickness:
70-100 Bj.L.S

Minimum Length:
1,00 m

Maximum Length:
12 m

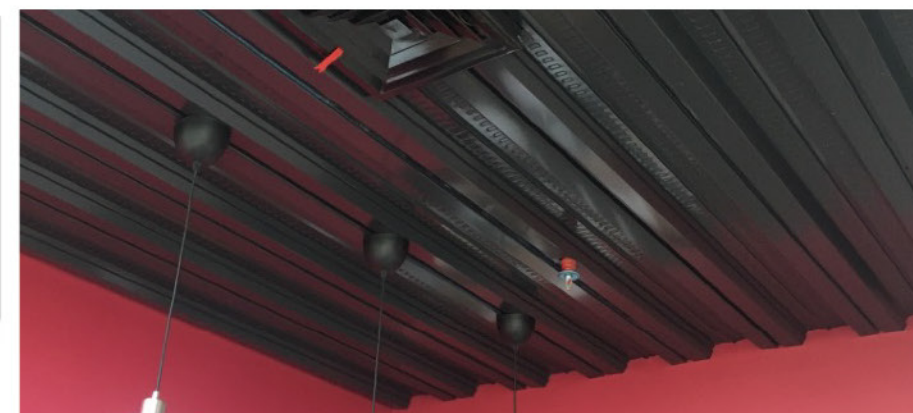

COMPODECK 1000

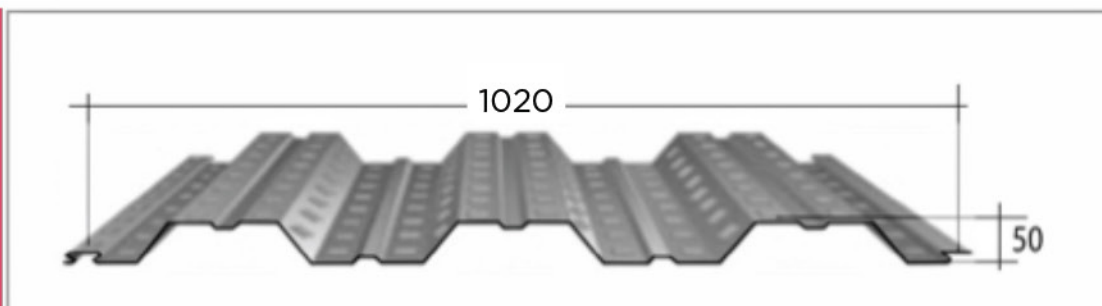

COMPODECK-1000


Thickness:
70-100 Bj.L.S

Minimum Length:
2,00 m

Maximum Length:
12 m



A-735

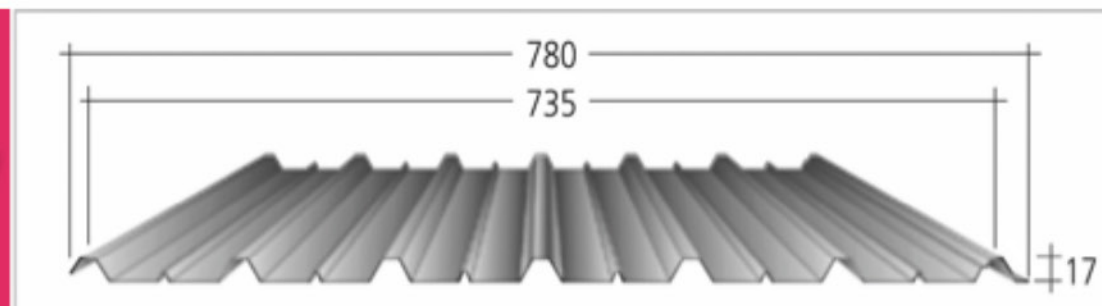


A-735

Thickness:
20-60 Bj.L.S

Minimum Length:
0,65 m

Maximum Length:
12 m

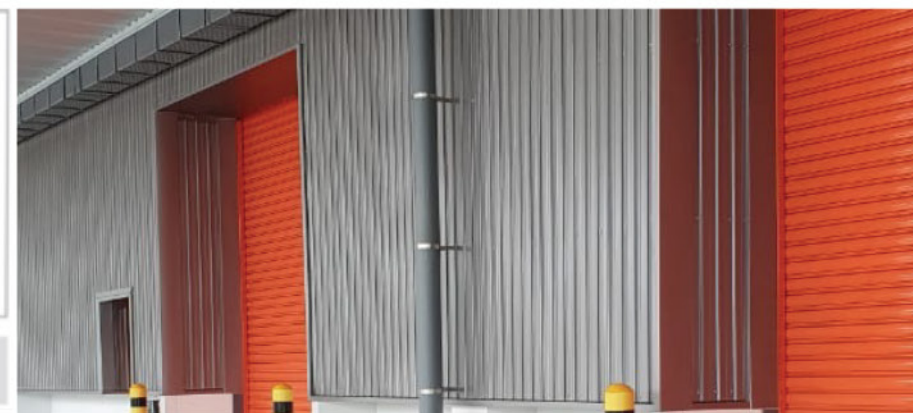


Roofing



Ceiling



Siding/Walling

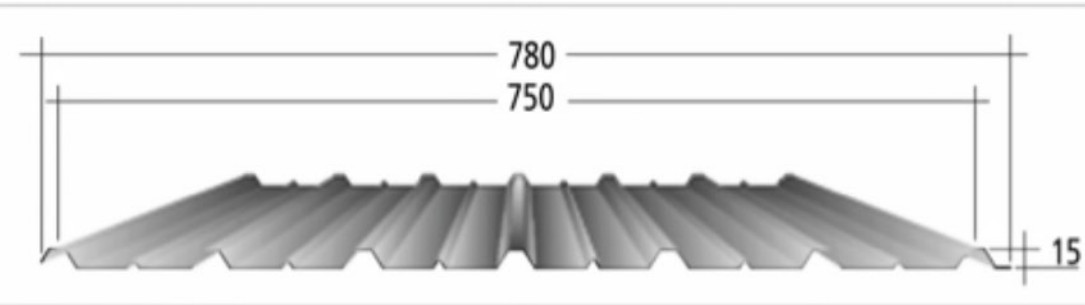

A-750

Thickness:
20-25 Bj.L.S

Minimum Length:
1,00 m

Maximum Length:
12 m




Roofing



Ceiling



Siding/Walling

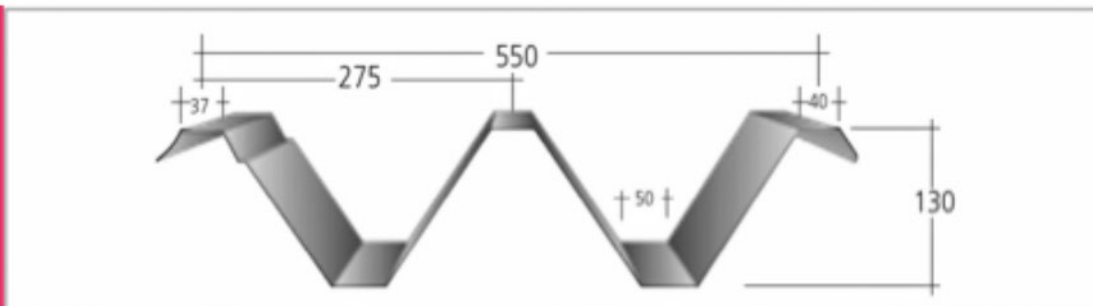

GP-550


Thickness:
45-80 Bj.L.S

Minimum Length:
1,50 m

Maximum Length:
12 m



Roofing

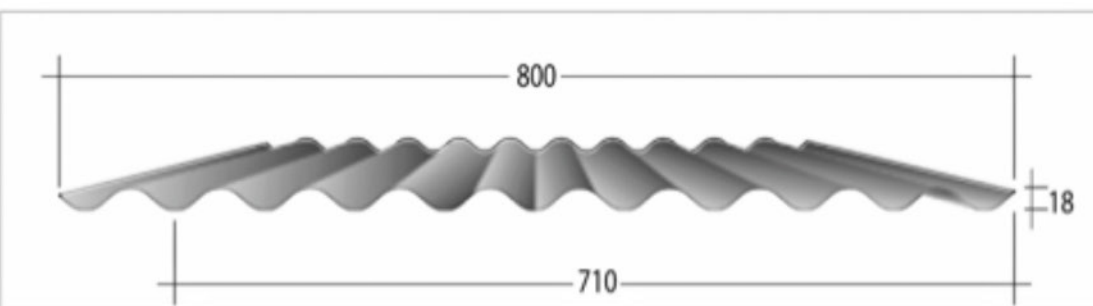

C-710

Thickness:
Hard: 20-30 Bj.L.S
Soft: 30-120 Bj.L.S

Minimum Length:
1,50 m


Maximum Length:
Hard: 3.65 m (for 20 Bj.L.S)
Soft: 3.65 m



Roofing




Ceiling



Siding/Walling



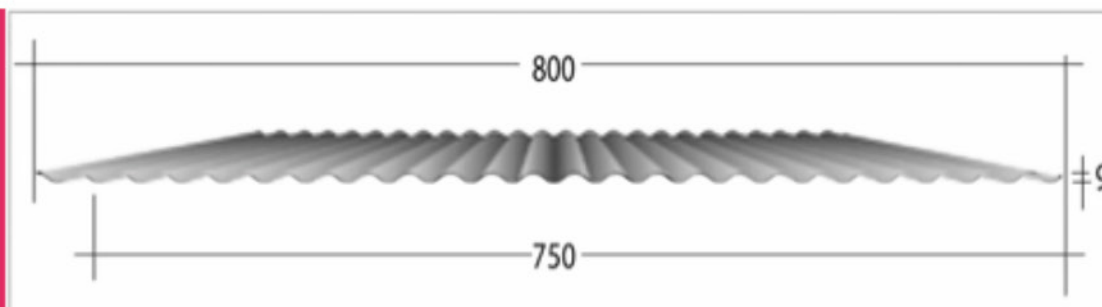

D-750

Thickness:
20-30 Bj.L.S

Minimum Length:
1,50 m

Maximum Length:
Cibitung : 1.829 m
Semarang : 3.658 m




Roofing



Ceiling



Siding/Walling

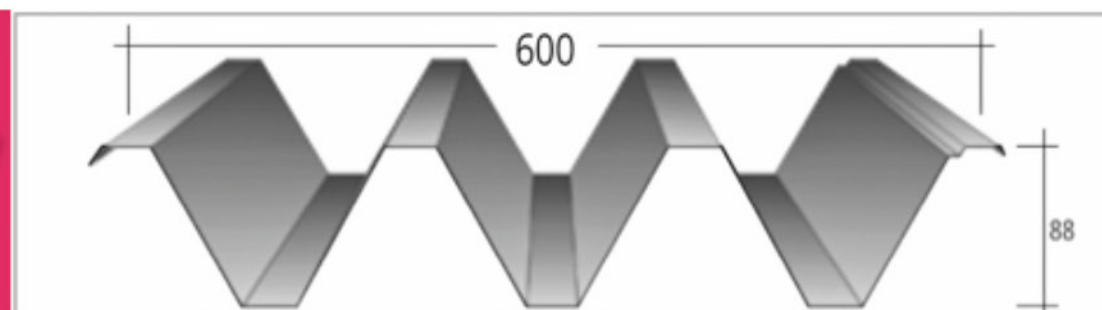


I-600


Thickness:
45-60 Bj.L.S

Minimum Length:
1,50 m

Maximum Length:
12 m

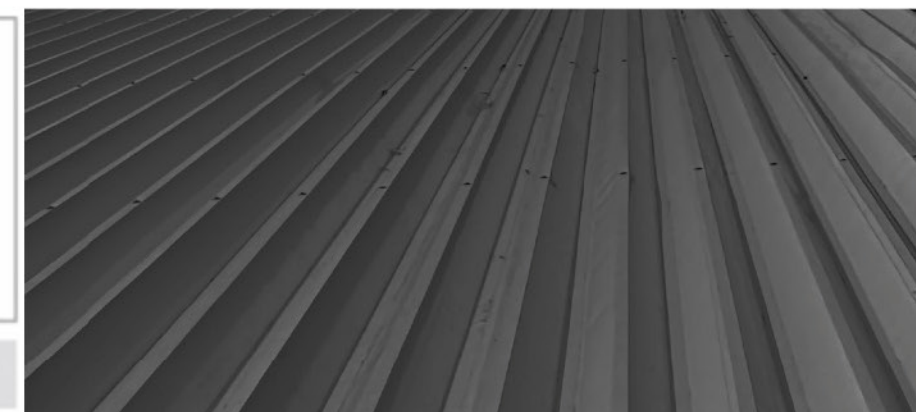

Roofing

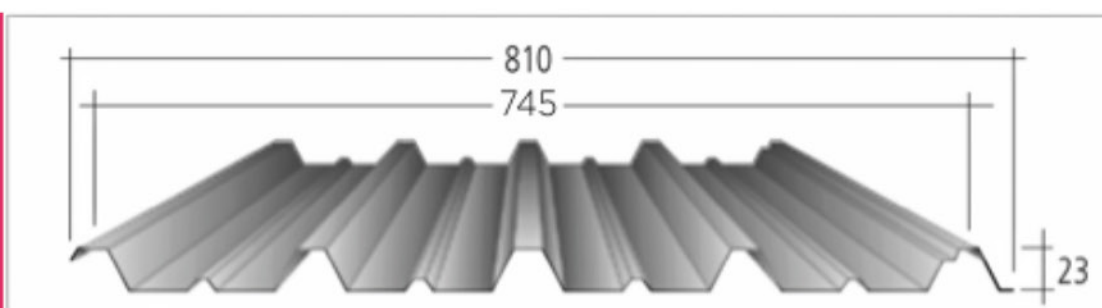

GG-750

Thickness:
30-60 Bj.L.S

Minimum Length:
0,65 m

Maximum Length:
12 m




Roofing



Ceiling



Siding/Walling

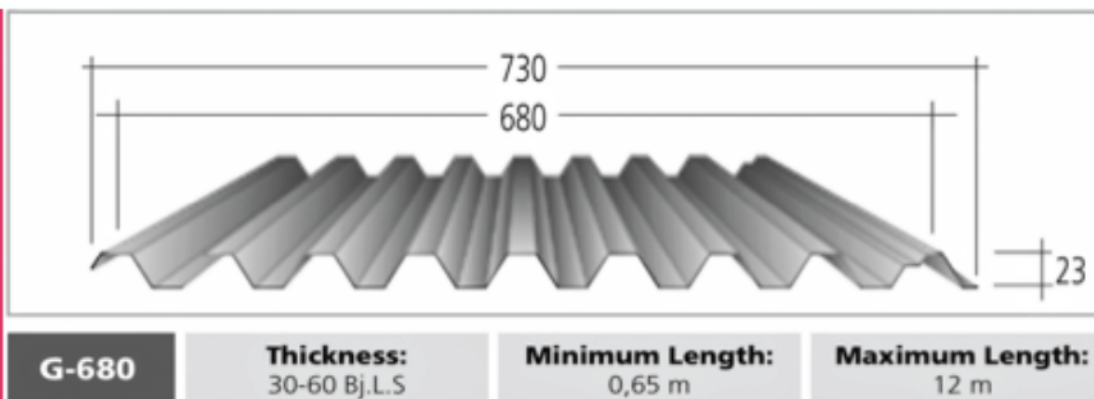



Roofing



Ceiling



Siding/Walling

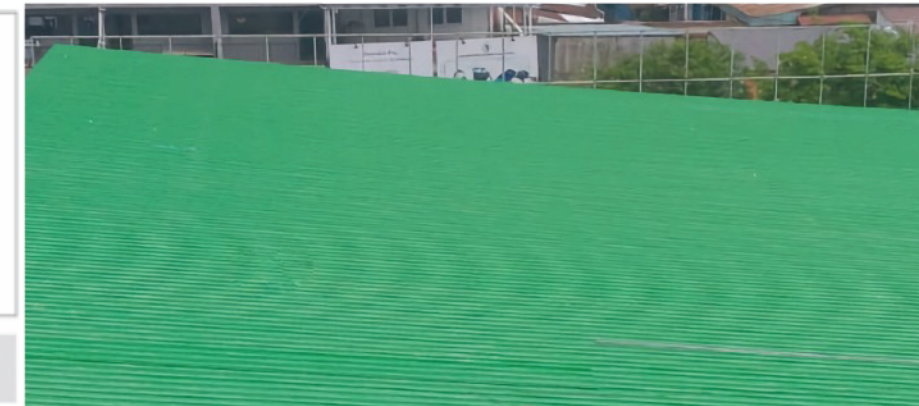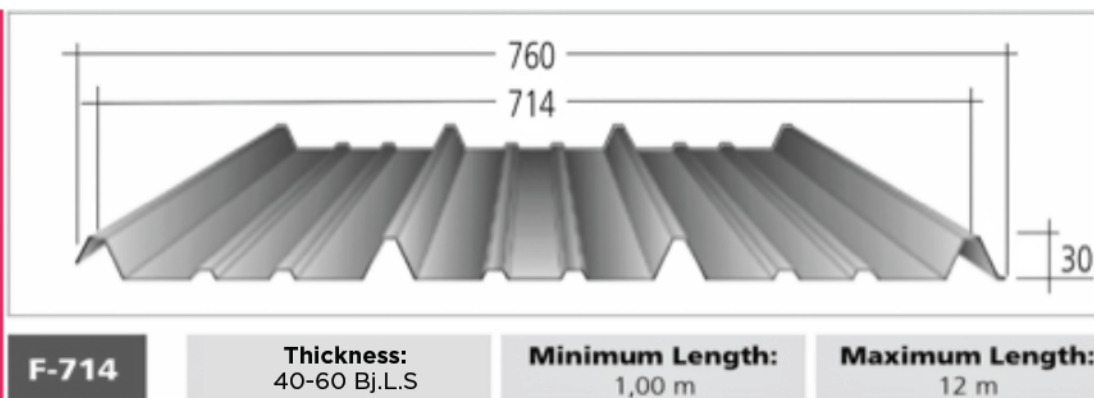


Roofing



Ceiling



Siding/Walling


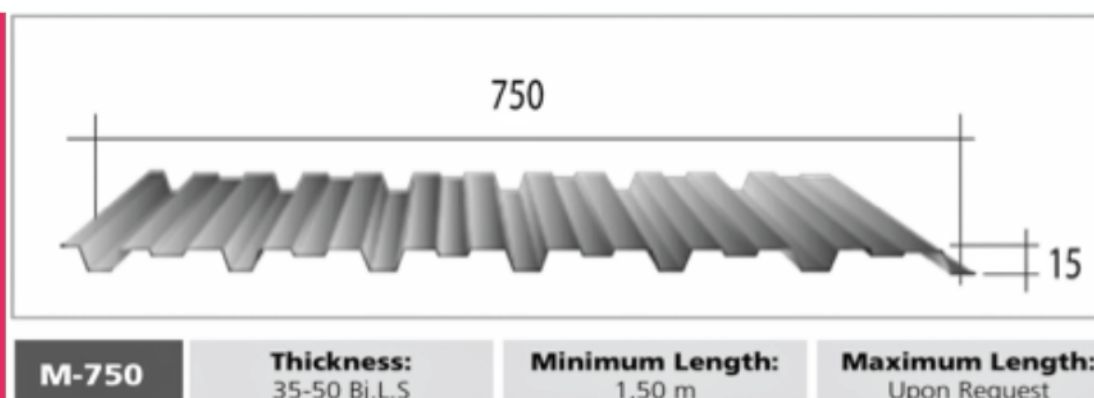


Ceiling



Siding/Walling

N-750

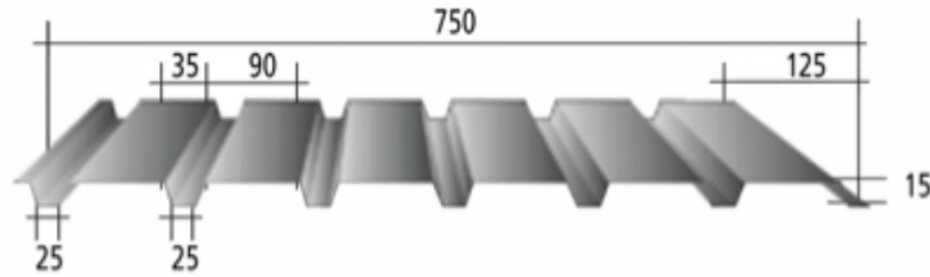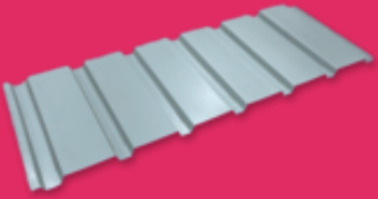

N-750

Thickness:
45-50 Bj.L.S

Minimum Length:
1,50 m

Maximum Length:
Upon Request





Ceiling



Siding/Walling

L-700

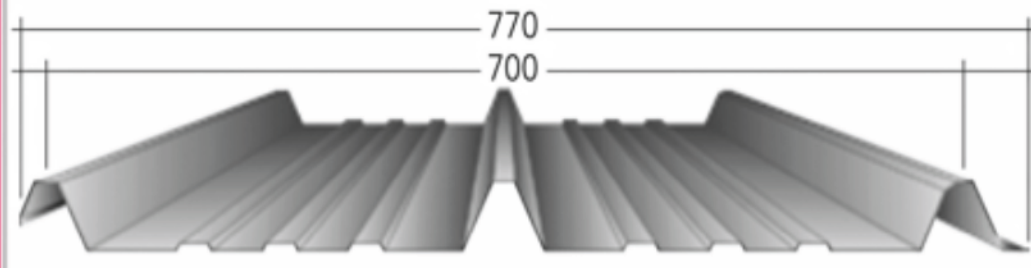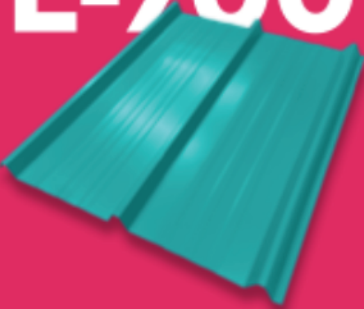

L-700

Thickness:
35-70 Bj.L.S

Minimum Length:
0,80 m

Maximum Length:
12 m



Roofing




Ceiling



Siding/Walling

B-832

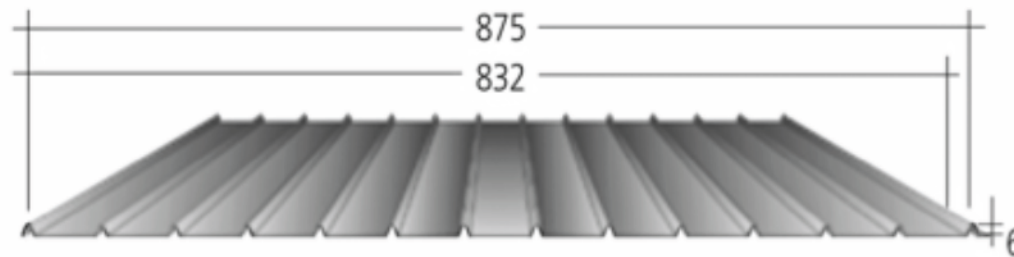

B-832

Thickness:
20-70 Bj.L.S

Minimum Length:
0,75 m

Maximum Length:
12 m



Ceiling



Siding/Walling