



TACO

2024 EDITION

PERFORM 300

WOOD SERIES

Wear Layer	0.2mm	Size	152.4mm x 914.4mm
Thickness	3.0mm	24 pieces/box	3.34sqm



TV 3013 White Oak



TV 3003 Washed Oak



TV 3031 Charleston Teak



TV 3015 Vicenza Elm



TV 3030 Butternut Teak



TV 3005 Vintage Oak

WOOD SERIES

Wear Layer	0.2mm	Size	152.4mm x 914.4mm
Thickness	3.0mm	24 pieces/box	3.34sqm



TV 3010 Warm Cherry



TV 3048 Chicago Oak **NEW**



TV 3047 Sierra Oak **NEW**



TV 3029 Summer Teak



TV 3008 Sand Malmo



TV 3014 Natural Beech

WOOD SERIES

Wear Layer	0.2mm	Size	152.4mm x 914.4mm
Thickness	3.0mm	24 pieces/box	3.34sqm



TV 3004 Parma Oak



TV 3017 Original Cherry



TV 3007 Merbau Wood



TV 3020 Bailey Acacia



TV 3021 Scottish Applewood

Perform 300 is a high quality Luxury Vinyl Flooring for your commercial and residential spaces. With our wide range of natural wood and stone patterns, **Perform 300** is the perfect solution for your beautiful flooring needs.

FLOOR VIEW

Choose and see how it looks in your room.



STONE SERIES

Wear Layer 0.2mm
Thickness 3.0mm

Size 304.8mm x 609.6mm
18 pieces/box 3.34sqm



TV 3024 Grey Slate



TV 3026 Stone



TV 3032 Natural Sand



TV 3033 Gray Sand

Size 457.2mm x 457.2mm

16 pieces/box 3.34sqm



TV 3027 Mozaic - Natural



TV 3028 Mozaic - Grey



TV 3024

TECHNICAL DATA

CHARACTERISTICS	TEST METHOD	PASS
Resistance to chemicals	EN423:93 Class 0	✓
Bearing castor	EN425:94	✓
Dimension squareness and straightness	EN427:94	✓
Thickness overall	EN429:93	✓
Thickness wear layer	EN429:93	✓
Residual indentation after static load	EN433:94	✓
Dimensional stability and curling after exposure to heat	EN434:94	✓
Shrinkage rate	≤0.25%	✓
Curling	≤2mm	✓
Flexibility	EN435:94(A) Bend around 20mm mandrel shows no sign of cracking	✓
Abrasion resistance	EN660- 1/- 2	✓
Color fastness to light	EN 20 ISO 105- B02 6 or above	✓
Toxic element test	EN 71-3	✓
Specific gravity	ASTM D792:91	✓
Coefficients of friction	ASTM D1894:01	✓
Sound reduction	DIN52210:4db	✓
Flammability	EN 71-2	✓
Smoke density	DIN4102/ASTM D2843- 99:Class B1	✓
Electrical resistance	EN1081 Method C	✓
Fungus test	ASTM G21:96 Grade 1	✓
IMO resolution	MSC61(67) Part 2	✓
	MSC61(67) Part 5	✓

PRODUCED UNDER HIGH QUALITY SUPERVISION WITH ISO 9001 ISO 14001 OHSAS 18001 CE STDS.



100%
WATERPROOF



EASY TO CLEAN &
MAINTAIN




TERMITE
PROOF





SIMPLE & QUICK
TO INSTALL

Wood Series

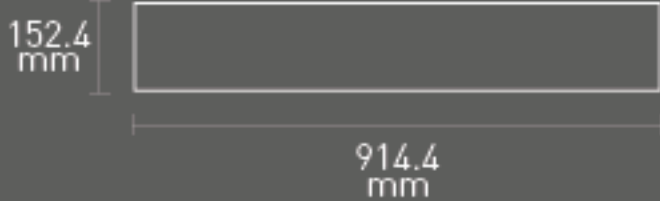

Stone Series

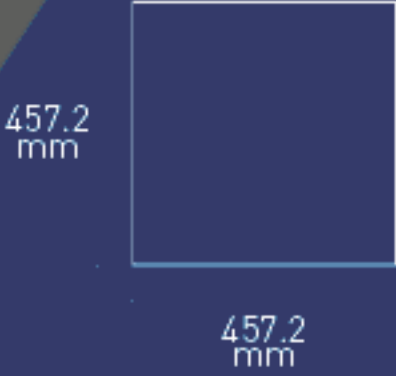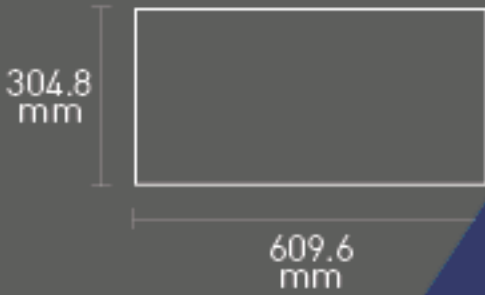

2024 EDITION

 PERFORM 300 XL

WOOD SERIES

Wear Layer	0.2mm	Size	228.6mm x 1219.2mm
Thickness	3.0mm	12 pieces/box	3.34sqm



TV 3034 XL Alaska Park



TV 3035 XL Oslo Sand



TV 3036 XL Malibu Beach



TV 3037 XL Jeju Alley

WOOD SERIES

Wear Layer	0.2mm	Size	228.6mm x 1219.2mm
Thickness	3.0mm	12 pieces/box	3.34sqm



TV 3038 XL Padang Bay



TV 3039 XL Havana Land



STONE SERIES

Wear Layer 0.2mm
Thickness 3.0mm

Size 457.2mm x 914.4mm
8 pieces/box 3.34sqm



TV 3046 XL White Oasis **NEW**



TV 3040 XL Canada Beige



TV 3041 XL Texas Grey




TV 3042 XL Colorado Nero

STONE SERIES

Wear Layer 0.2mm
Thickness 3.0mm

Size 457.2mm x 914.4mm
8 pieces/box 3.34sqm

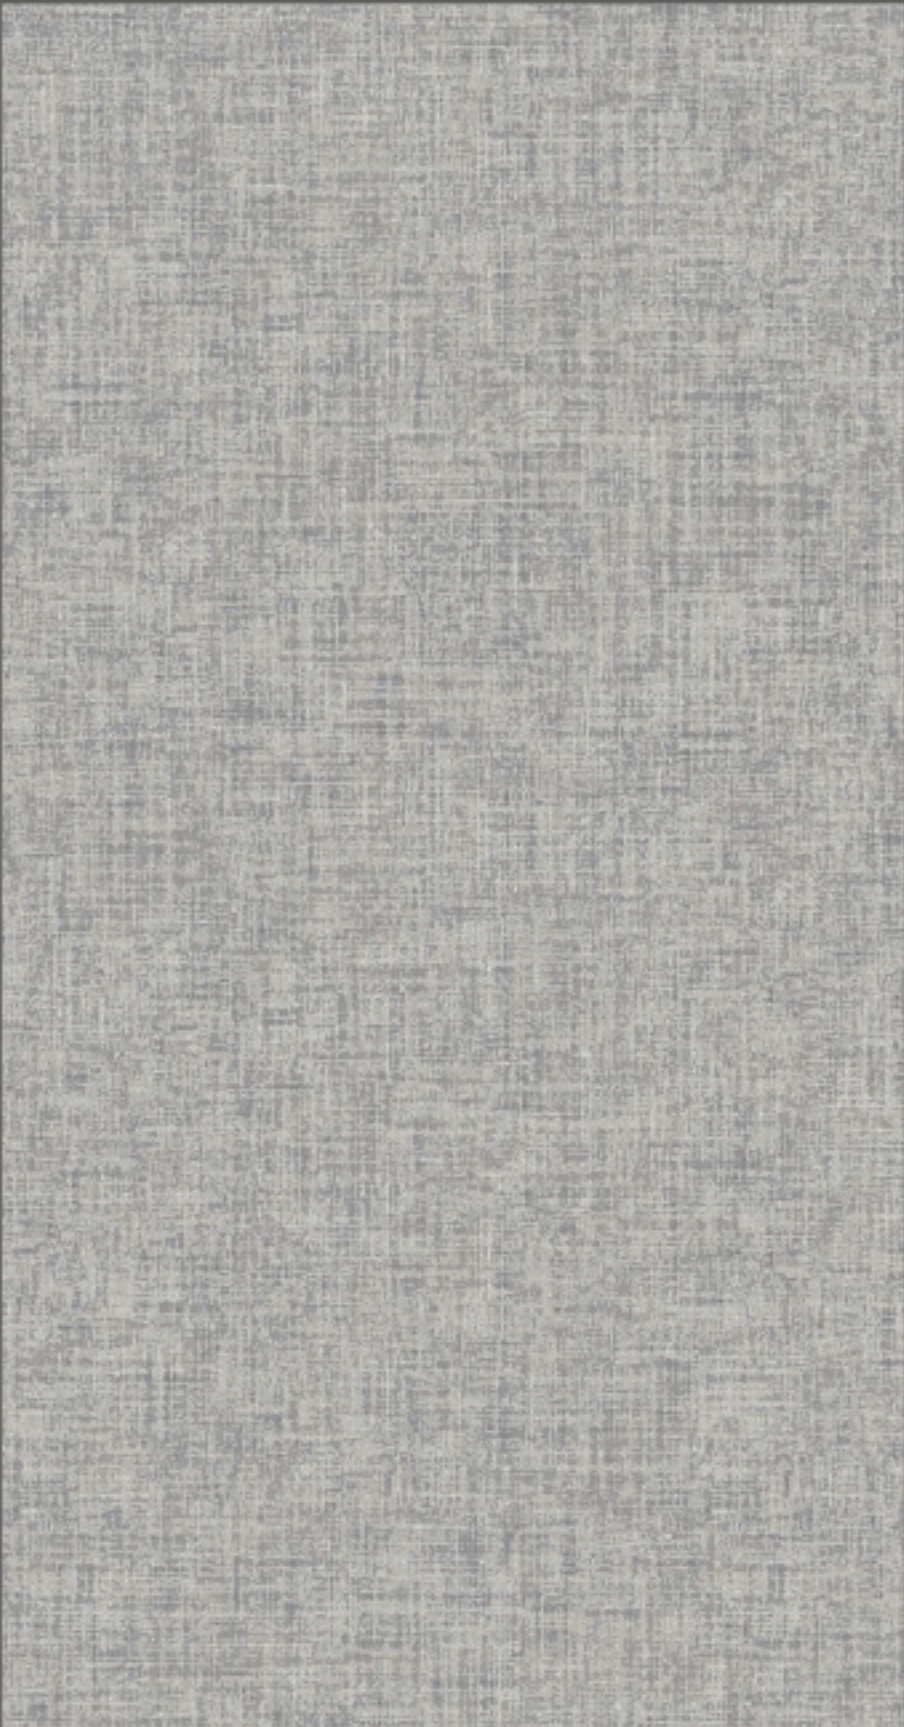

TV 3043 XL Austin Linston



TV 3045 XL Dallas Linston



TV 3044 XL Houston Linston



FLOOR VIEW

Choose and see how
it looks in your room.



TECHNICAL DATA

CHARACTERISTICS	TEST METHOD	PASS
Resistance to chemicals	EN423:93 Class 0	✓
Bearing castor	EN425:94	✓
Dimension squareness and straightness	EN427:94	✓
Thickness overall	EN429:93	✓
Thickness wear layer	EN429:93	✓
Residual indentation after static load	EN433:94	✓
Dimensional stability and curling after exposure to heat	EN434:94	✓
Shrinkage rate	≤0.25%	✓
Curling	≤2mm	✓
Flexibility	EN435:94(A) Bend around 20mm mandrel shows no sign of cracking	✓
Abrasion resistance	EN660-1/-2	✓
Color fastness to light	EN 20 ISO 105-B02 6 or above	✓
Toxic element test	EN 71-3	✓
Specific gravity	ASTM D792:91	✓
Coefficients of friction	ASTM D1894:01	✓
Sound reduction	DIN52210:4db	✓
Flammability	EN 71-2	✓
Smoke density	DIN4102/ASTM D2843-99:Class B1	✓
Electrical resistance	EN1081 Method C	✓
Fungus test	ASTM G21:96 Grade 1	✓
IMO resolution	MSC61(67) Part 2 MSC61(67) Part 5	✓ ✓

PRODUCED UNDER HIGH QUALITY SUPERVISION WITH ISO 9001 ISO 14001 OHSAS 18001 CE STDS.



100%
WATERPROOF



EASY TO CLEAN &
MAINTAIN



TERMITE
PROOF




SIMPLE & QUICK
TO INSTALL

Wood Series



Stone Series

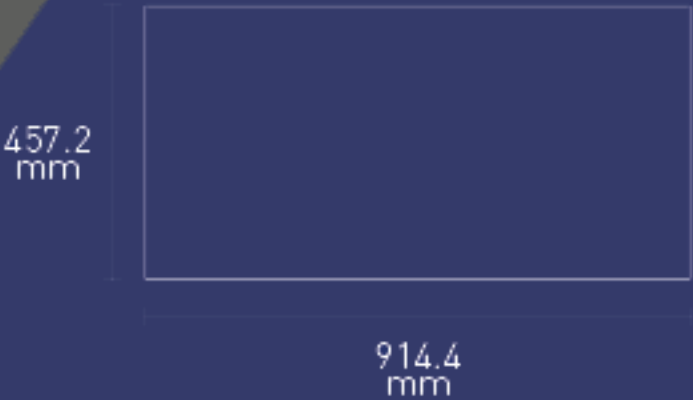

2024 EDITION

 ULTRACORE 500 SPC

WOOD SERIES

Wear Layer	0.3mm	Size	172mm x 1210mm
Thickness	5.0mm	11 pieces/box	2.29sqm



TV 5501 SPC Tuscany Oak



TV 5520 SPC Vienna Oak **NEW**



TV 5521 SPC Santiago Oak **NEW**



TV 5507 SPC Finnish Oak



TV 5502 SPC Ottawa Oak

WOOD SERIES

Wear Layer	0.3mm	Size	172mm x 1210mm
Thickness	5.0mm	11 pieces/box	2.29sqm



TV 5503 SPC Valencia Oak



TV 5509 SPC Wild Cherry



TV 5504 SPC Golden Acacia



TV 5511 SPC Ontario Hickory



TV 5505 SPC Carson Oak

WOOD SERIES

Wear Layer	0.3mm	Size	172mm x 1210mm
Thickness	5.0mm	11 pieces/box	2.29sqm



TV 5510 SPC Canyon Oak



TV 5506 SPC Glenmore Oak




TV 5508 SPC Madeira Walnut



TV 5512 SPC Somerset Applewood

Built-in
1mm IXPE
Underlay

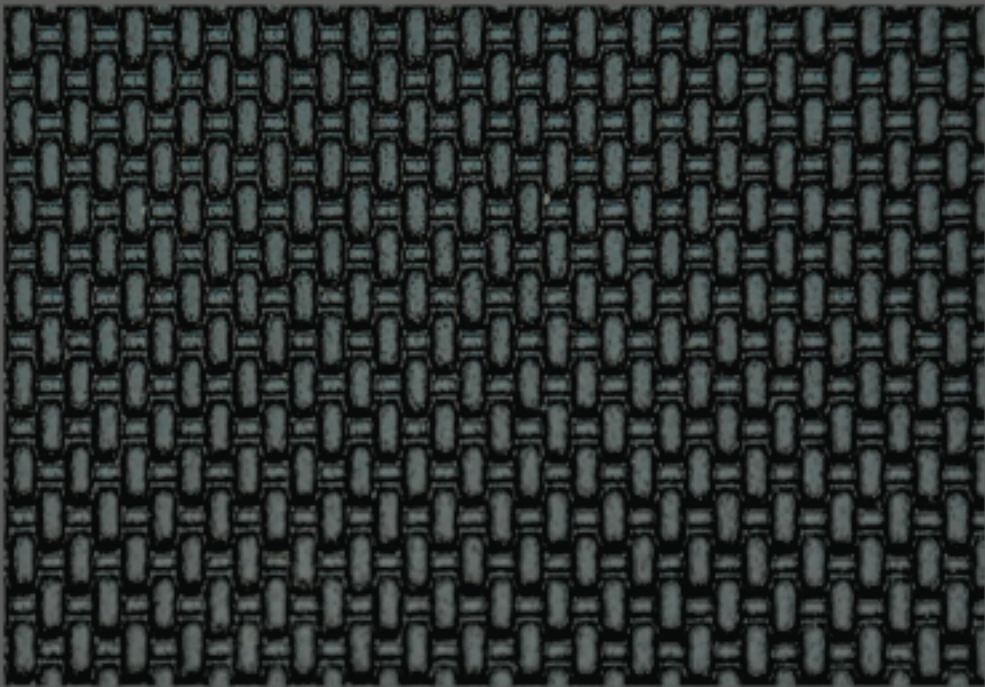

FLOOR VIEW

Choose and see how
it looks in your room.



STONE SERIES

Wear Layer	0.3mm	Size	300mm x 600mm
Thickness	5.0mm	12 pieces/box	2.16sqm



TV 5519 SPC **NEW**
Brown Sterling



TV 5517 SPC **NEW**
Grey Air



TV 5518 SPC **NEW**
Grey Sterling



TV 5516 SPC
Concrete




TV 5518 SPC
NEW

TECHNICAL DATA

CHARACTERISTICS	TEST METHOD	PASS
Overall thickness	ASTM F386-11	✓
Thickness of wear layer	ASTM F410-08 (2013)	✓
Residual indentation	ASTM F1914-07 (2011)	✓
Dimension stability	ASTM F2199-09 (2014)	✓
Resistance to chemical	ASTM F925-13	✓
Resistance to heat	ASTM F1514-03 (2013)	✓
Resistance to light	ASTM F1515-15	✓
Castor chair	NALFA LF 01-2011 : No Obvious Damage	✓
Fungi resistance	ASTM G21-15 : Rating 0, no growth	✓
Formaldehyde content	ASTM D6007-14 : Not Detected	✓
Impact resistance	DIN 51130:2014	✓
Reaction to fire	EN 13501-1	✓

PRODUCED UNDER HIGH QUALITY SUPERVISION WITH ISO 9001 ISO 14001 OHSAS 18001 CE STDS.



CLICK
SYSTEM



100%
WATERPROOF



EASY TO CLEAN &
MAINTAIN



0.3mm
WEAR LAYER



TERMITE
PROOF



SIMPLE & QUICK
TO INSTALL

